


KLIK LADDER FRAME SCAFFOLD TOWER SINGLE WIDTH KIT LIST

AVAILABLE IN THREE LENGTHS: 2m, 2.5m or 3m

This range of Single Width Klik Towers gives an exceptional versatile system ideal for working in narrow or confined spaces such as stairwells, corridors, alleyways etc.

All frames can be used as uppers or lowers, simply place the platform on the third rung below the top of the tower and the correct guardrail height is achieved. The number of trapdoor platforms in the Tower Kit List is sufficient to assemble and dismantle the tower by the 3T method. The platform levels marked * indicate that these platforms and handrails are repositioned.

A6163/1

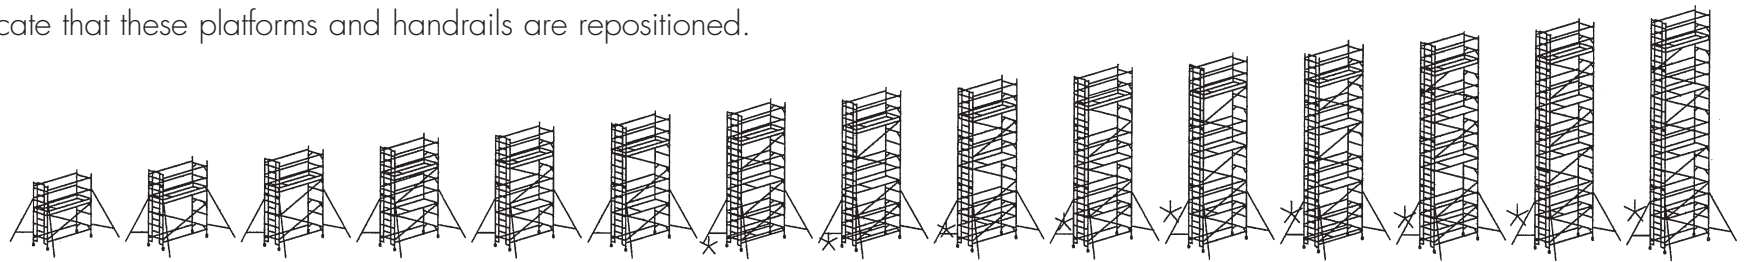

WORK HEIGHT	3.41	3.88	4.34	4.81	5.27	5.73	6.20	6.66	7.13	7.59	8.05	8.52	8.98	9.45	9.91
TOWER HEIGHT	2.66	3.13	3.59	4.06	4.52	4.98	5.45	5.91	6.38	6.84	7.30	7.77	8.23	8.70	9.16
PLATFORM HEIGHT	1.41	1.88	2.34	2.81	3.27	3.73	4.20	4.66	5.13	5.59	6.05	6.52	6.98	7.45	7.91
PARTS LIST															
CASTOR	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
ADJ.LEG	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
3 RUNG PLAIN FRAME		2	1				1								
3 RUNG LADDER FRAME		2	1				1								
4 RUNG PLAIN FRAME			1	2	1		2	3	2	1		4	3	2	1
4 RUNG LADDER FRAME			1	2	1		2	3	2	1		4	3	2	1
5 RUNG PLAIN FRAME	1				1	2			1	2	3		1	2	3
5 RUNG LADDER FRAME	1				1	2			1	2	3		1	2	3
DIAGONAL BRACE	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9
HORIZONTAL BRACE	6	6	6	10	10	10	10	10	10	10	10	14	14	14	14
TRAPDOOR PLATFORM	1	1	1	2	2	2	2	2	2	2	2	3	3	3	3
STABILIZER		4	4	4	4	4	4	4							
TELESCOPIC STABILIZER									4	4	4	4	4	4	4
TOEBOARD ASSEMBLY	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
TOWER WEIGHT (Kgs)															
2m LENGTH	77	100	105	130	136	139	147	150	156	167	173	200	206	209	215
2.5m LENGTH	82	104	109	137	144	147	155	158	164	176	182	212	218	221	227
3m LENGTH	88	110	116	149	155	159	167	170	178	188	194	229	235	239	245