

EURO TOWERS LTD

MANUFACTURERS OF ALUMINIUM ACCESS EQUIPMENT

MANUFACTURED TO A TUV CERTIFIED ISO 9001 QUALITY CONTROL SYSTEM

TRADE TOWER 3T

PLEASE FOLLOW THE INSTRUCTIONS

Insert the base plates into the frames. Fit 2 horizontal braces as low as possible to the vertical rungs of the frame. Fit 2 diagonal braces opposing each other starting on the bottom rung. Level tower. If required fit stabilizers at this point.

SINGLE LIFT – 1.9m BASE PACK + PLATFORM PACK

Fit temporary trapdoor platform, stand on the platform and fit the guard rail frames on top of the base frames, ensure the interlock pins are engaged. Remove temporary trapdoor platform and place on the sixth rung. Sit through the trapdoor and fit 4 horizontal braces to both sides to act as mid rails and guard rails. Fit toe boards.


2 LIFT – 3.7m BASE PACK + EXTENDER PACK+ PLATFORM PACK + 1 STABILIZER PACK

After the base is built fit temporary trapdoor platform, stand on the platform and add two more 6 rung frames. Ensure the interlock pins are engaged. Remove temporary trapdoor platform and place it on the sixth rung. Sit through the trapdoor and fit 4 horizontal braces to both sides to act as mid rails and guard rails. Stand on the platform and add two further diagonal braces. Fit the guard rail frames on to the top of the frames above you, and then place the next platform on the 12th rung. Climb and sit through the trapdoor and fit 4 horizontal braces to both sides to act as mid rails and guard rails. Fit toe boards.

3 LIFT – 5.5m BASE PACK + 2 x EXTENDER PACK + PLATFORM PACK + STABILIZER PACK

After the base is built fit temporary platform, stand on the platform and add two more 6 rung frames. Ensure the interlock pins are engaged. Remove temporary platform and place it on the 6th rung. Sit through the trapdoor and fit 4 horizontal braces to both sides to act as mid rails and guard rails. Stand on platform and fit the next platform above you on the on the 12th rung. Sit through the trapdoor and fit the horizontal braces to both sides to act as mid rails and guard rails. Stand on board and fit the guard rail frames to the top of the frames above ensure the interlock pins are engaged, then place the platform on the 18th rung. Sit through the trapdoor and fit the horizontal braces to both sides to act as mid rail and guard rails. Fit toe boards.

MAX SAFE WORKING LOAD FOR PLATFORM 250KG
MAX SAFE WORKING LOAD FOR STRUCTURE 450KG

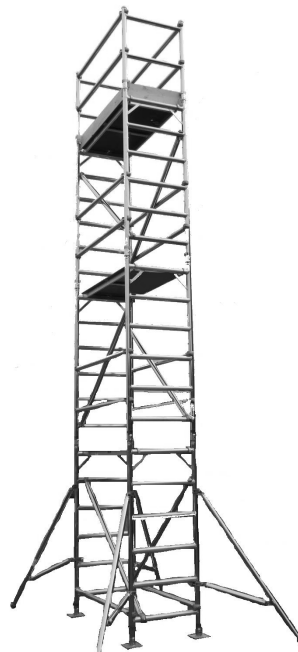

ONE LIFT KIT LIST

4 X TTAB – Adjustable bases
2 X TTF – Trade frames
2 X TTDB – Trade diagonal brace
6 X TTHB – Trade horizontal brace
1 X TTP – Trade Trapdoor platform
2 X TTGF – Trade Guardrail frame
1 X TTTB – Trade Toeboard assy

TWO LIFT KIT LIST

4 X TTAB – Adjustable bases
4 X TTF – Trade frames
4 X TTDB – Trade diagonal brace
10 X TTHB – Trade horizontal brace
4 X SKS1 – Standard Stabilizer
2 X TTP – Trade Trapdoor platform
2 X TTGF – Trade Guardrail frame
1 X TTTB – Trade Toeboard assy

THREE LIFT KIT LIST

4 X TTAB – Adjustable bases
6 X TTF – Trade frames
14 X TTDB – Trade diagonal brace
14 X TTHB – Trade horizontal brace
4 x SKS1 – Standard Stabilizer
3 X TTP – Trade Trapdoor platform
2 X TTGF – Trade Guardrail frame
1 X TTTB – Trade Toeboard assy

GENERAL SAFETY RULES

1. Do not use if the product is damaged or has parts missing
2. Do not use on unstable ground such as loose bricks, boxes or blocks
3. Before use ensure that the base plates are fully fitted to the frame, tighten if necessary.
4. Remove all personnel and materials before moving the unit, only move by pushing at the base if applicable
5. Do not gain extra height by using boxes, ladders etc on the platform.
6. Ensure that the locking hooks on platforms are functioning correctly.
7. Ensure that the frame interlock clips are properly fitted.
8. If there is an overhead hazard use head protection
9. Never gain entrance to the platform by climbing over the outside of the unit.
10. Do not over load the unit
11. Dismantling is the reverse of assembly