

EURO TOWERS LTD

UK Manufacturer of Aluminium Access Equipment

Windscreen Unit Mobile Aluminium Folding Access System



GENERAL SAFETY RULES

Please read this guide carefully before using this equipment.

Please note that photographs are for illustrative purposes only.

You can download our user guides from our website at eurotowers.co.uk

This step by step user guide provides you with easy to follow instructions to assemble the Windscreen Unit safely.

For further information on the safe use of mobile access equipment follow the PASMA operator's code of practice.

Risk Assessment

A risk assessment should be carried out before using any access equipment.

For further help, guidance or information on this or other products please contact Euro Towers Limited on +44 (0)1604 644774 or email sales@eurotowers.co.uk

GENERAL SAFETY RULES

Before use

Read these instructions.

Maintenance guide

Inspect the equipment to ensure that all parts are present according to the kit lists and that all parts function correctly and are not damaged. No damaged parts are to be used.

Keep the components clean to ensure free assembly and dismantling, and to remove slip/trip hazards from frame rungs and platforms.

Do not misuse or abuse the equipment with heavy objects, hammers etc... do not throw the equipment in and out of vehicles, or to the ground when dismantling. Such abuse may reduce the structural integrity of the system.

REMEMBER YOUR SAFETY DEPENDS ON THE SAFE ASSEMBLY AND USE OF THIS EQUIPMENT, RESPECT IT.

GENERAL SAFETY RULES

Mobile work platforms may only be assembled and dismantled by persons familiar with these instructions

Do not use any access equipment which is damaged, which has not been properly assembled, which is not firm and stable, and which has missing or damaged parts.

Do not erect the equipment on unstable ground or objects, such as loose bricks, boxes or blocks.

Ensure the Windscreen unit is always level, use the adjustable legs where required. Never use adjustable legs to gain extra height, always lock the castor brakes before use.

Ensure that all gates, frames, braces, platforms and stabilizers are firmly in place and that all locking mechanisms are functioning correctly. Ensure that all frame locking clips are engaged. If any are missing, replace them.

Do not sheet or use a sheeted Windscreen unit system.

Do not assemble or use a Windscreen unit system near un-insulated, live or energized

electrical machinery or circuits or near machinery in operation.

If an overhead hazard exists suitable head protection should be worn.

Do not lean ladders against or climb the outside of the folding tower system.

Always gain access onto the platform via the ladder and gate.

Do not gain access to or descend from a platform other than by the intended means of access.

Do not work from the frame rungs, they are guardrails and for your protection only.

Never climb the gate, horizontal or diagonal braces or use boxes, crates, ladders etc... to gain extra height.

Guardrails must be fitted to all platforms.

Do not exceed the safe working load of the platform/structure by accumulating debris, materials or tools on the platforms.

Never jump onto or off a platform.

Do not over-reach out of the Windscreen unit systems.

Never attach hoists or other lifting equipment to Windscreen unit systems.

If you must move the unit, remove all materials and personnel. Ensure the route to be taken is clear of obstructions, overhead and on the ground. Apply force manually by pushing at the base.

Kit List

4 x Castors

4 x Adjustable Legs

1 x Base Unit

1 x Gate Access Frame

1 x Guardrail Frame

1 x Platform

1 x Access Ladder

2 x Horizontal Braces

4 x Stabilizers (2 x Left / 2 x Right)

Before use, check the tower is complete, use a spirit level and adjust as required.

Platform Level – 1.3m

**MAX SAFE WORKING LOAD FOR PLATFORM
250KG**

Assembly Instructions


Ensure all parts are present and are not damaged before assembling

Safety Guard Rails

Guard rails are for your safety, use them.

Safe Access

Access is made via the ladder and trough the gate frame.

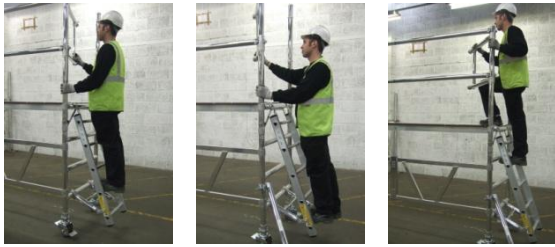

Windscreens

Pass the windscreens up to or from the unit via the side aperture at the opposite end from the gate access.



INSTRUCTIONS FOR USE:


1. Ensure all castors are firmly fitted to the folding base unit.



2. Open folding frame and engage toggle clamps.




3. Secure the guardrails to the base unit and fit the platform on to the bottom rung of the guardrail sections.



4. Clip the horizontal braces above the rungs to the guardrail sections and lock castors.



5. Fit ladder to the same level as the platform at the gate end of base unit and level unit.

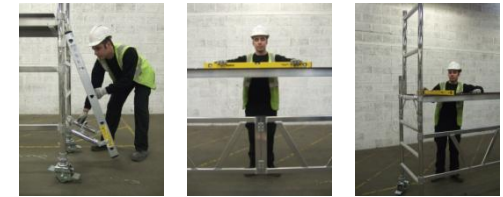

6. Fit stabilizers.



7. Dismantling is the reverse of assembly.
Note: Use a spirit level to ensure the unit is level before use.

For further help, guidance or information
on this or other products please contact

Euro Towers Limited

Unit 5 Edgemoor Close
Round Spinney
Northampton
NN3 8RG

Tel: 01604 644 774

Fax: 01604 499 544

Email: sales @eurotowers.co.uk

www.eurotowers.co.uk



EURO TOWERS LTD
UK Manufacturer of Aluminium Access Equipment