KLIK LADDER FRAME SCAFFOLD TOWER DOUBLE WIDTH KIT LIST AVAILABLE IN THREE LENGTHS: 2m, 2.5m or 3m

This range of Double Width Klik Towers gives an exceptional versatile system ideal for working in normal applications. All frames can be used as uppers or lowers, simply place the platform on the third rung below the top of the tower and the correct guardrail height is achieved. The number of plain and trapdoor platforms in the tower kit list is sufficient to assemble and dismantle the tower by the 3T method.

The platform levels marked * indicate that these platforms and handrails are repositioned.

A6164/2

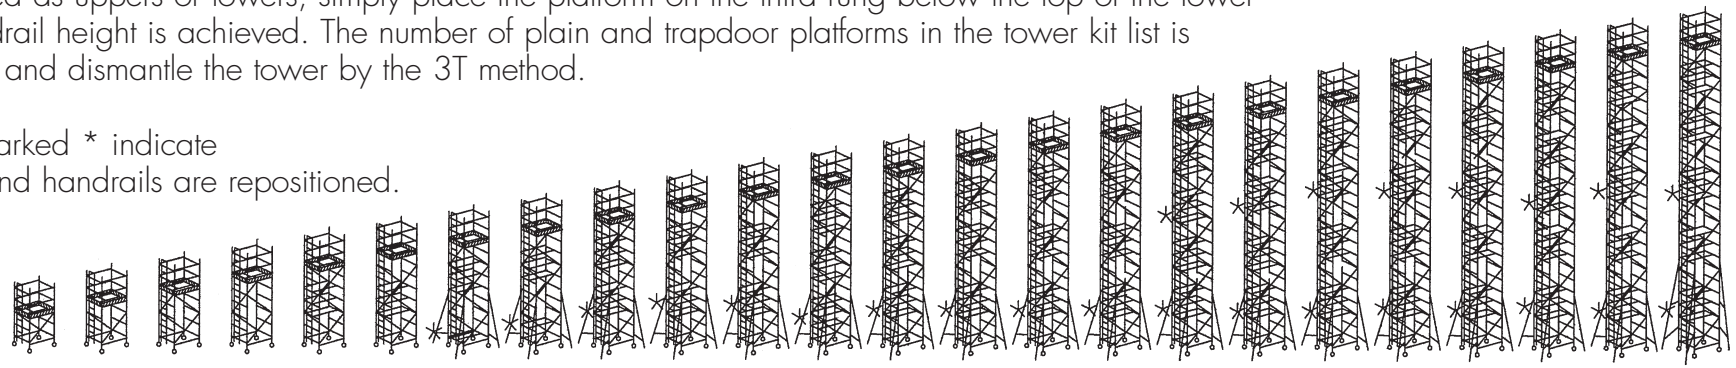

WORK HEIGHT	3.41	3.88	4.34	4.81	5.27	5.73	6.20	6.66	7.13	7.59	8.05	8.52	8.98	9.45	9.91	10.37	10.84	11.30	11.77	12.23	12.69	13.16	13.62	14.09
TOWER HEIGHT	2.66	3.13	3.59	4.06	4.52	4.98	5.45	5.91	6.38	6.84	7.30	7.77	8.23	8.70	9.16	9.37	9.84	10.30	10.77	11.23	11.69	12.16	12.62	13.09
PLATFORM HEIGHT	1.41	1.88	2.34	2.81	3.27	3.73	4.20	4.66	5.13	5.59	6.05	6.52	6.98	7.45	7.91	8.37	8.84	9.30	9.77	10.23	10.69	11.16	11.62	12.09
PARTS LIST																KIT LIST ABOVE 8m PLATFORM FOR INDOOR USE ONLY								
CASTOR	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
ADJUSTABLE LEG	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
3 RUNG PLAIN FRAME		2	1				1																	
3 RUNG LADDER FRAME		2	1				1																	
4 RUNG PLAIN FRAME			1	2	1		2	3	2	1		4	3	2	1		4	3	2	1		4	3	2
4 RUNG LADDER FRAME			1	2	1		2	3	2	1		4	3	2	1		4	3	2	1		4	3	2
5 RUNG PLAIN FRAME	1				1	2			1	2	3		1	2	3	4	1	2	3	4	5	2	3	4
5 RUNG LADDER FRAME	1				1	2			1	2	3		1	2	3	4	1	2	3	4	5	2	3	4
DIAGONAL BRACE	2	2	4	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24
HORIZONTAL BRACE	6	6	6	6	10	10	10	10	10	10	10	14	14	14	14	14	14	14	14	14	14	18	18	18
PLAIN PLATFORM	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
TRAPDOOR PLATFORM	1	1	1	1	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	4	4	4
STABILIZER				4	4	4	4	4	4															
TELESCOPIC STABILIZER										4	4	4	4	4	4	4	4	4	4	4				
JUMBO STABILIZER																					4	4	4	4
TOEBOARD ASSEMBLY			1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
TOWER WEIGHT (Kgs)																								
2m WEIGHT (Kgs)	96	104	111	130	161	166	176	180	188	201	210	237	248	251	260	264	273	278	287	291	300	327	336	341
2.5m LENGTH	104	112	119	139	174	177	189	189	202	215	224	255	264	269	279	283	293	298	307	312	321	351	361	388
3m LENGTH	119	121	130	149	189	194	205	209	219	232	242	276	286	291	301	306	316	321	331	336	346	381	391	396